

product_datasheet_title

LED Slim Line 118 100 300° 12W 827 Clear R7s

LED SLIM LINE R7S | Slim LED lamps with retrofit base R7s



technical_data

ELECTRICAL DATA

Nominal wattage	12 W
Construction wattage	12.00 W
Nominal voltage	220...240 V
Operating mode	AC Mains
Claimed equiv. conventional lamp power	100 W
Nominal current	81 mA
Type of current	AC
Inrush current	4.13 A
Operating frequency	50/60 Hz
Mains frequency	50/60 Hz
Max. lamp number on MCB B10 A	63
Max. lamp number on MCB B16 A	81
Total harmonic distortion	< 150 %
Power factor λ	≥ 0.50

PHOTOMETRICAL DATA

Luminous flux	1521 lm
Nominal useful luminous flux 90°	1521 lm
Luminous efficacy	126 lm/W
Lumen main.fact.at end of nom.life time	0.90
Light color (designation)	Warm White
Color temperature	2700 K
Color rendering index Ra	≥ 80
Light color	827
Standard deviation of color matching	≤ 6 sdcn
Rated LLMF at 6,000 h	0.80
Flickering metric (Pst LM)	1.0
Stroboscope effect metric (SVM)	0.4




349927_2700K_Evl_5630.eps

LIGHT TECHNICAL DATA

Beam angle	300 °
Warm-up time (60 %)	< 0.50 s
Starting time	< 0.5 s

DIMENSIONS & WEIGHT

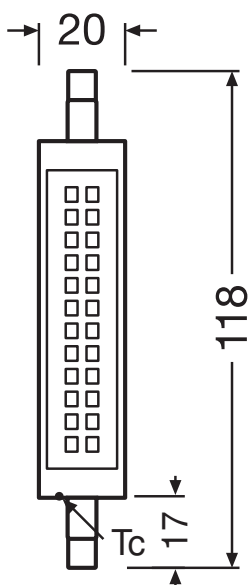

Overall length	118.00 mm
Diameter	20,0 mm
Maximum diameter	20 mm

Product weight	30.00 g
----------------	---------

TEMPERATURES & OPERATING CONDITIONS

Ambient temperature range	-20...+40 °C
Maximum temperature at tc test point	74 °C

LIFESPAN

Lifespan L70/B50 at 25 °C	15000 h
Number of switching cycles	100000
Lumen maintenance at end of service lifetime	0.90
Rated lamp survival factor at 6,000 h	≥ 0.90

ADDITIONAL PRODUCT DATA

Base (standard designation)	R7s
Mercury content	0.0 mg
Mercury-free	Yes
Design / version	Clear
Product remark	All technical parameters apply to the entire lamp / Due to the complex production process for light-emitting diodes, the typical values shown for the technical LED parameters are purely statistical values that do not necessarily match the actual technical parameters of each individual product, which can vary from the typical value

CAPABILITIES

Dimmable	no
----------	----

CERTIFICATES & STANDARDS

Energy efficiency class	E 1)
Energy consumption	12.00 kWh/1000h
Type of protection	IP20
Standards	CE / EAC
Photobiological safety group acc. to EN62778	RG1

1) Energy efficiency class (EEC) on a scale of A (highest efficiency) to G (lowest efficiency)

COUNTRY-SPECIFIC CATEGORIZATIONS

Order reference	LESLIM118100 12
-----------------	-----------------



LOGISTICAL DATA

Temperature range at storage	-20...+80 °C
------------------------------	--------------

Energy labelling regulation data

Lighting technology used	LED
Non-directional or directional	NDLS
Mains or non-mains	MLS
Light source cap-type (or other electric interface)	R7s
Connected light source (CLS)	no
Color-tuneable light source	no
Envelope	No
High luminance light source	no
Anti-glare shield	no
Correlated colour temperature type	SINGLE_VALUE
Standby power	0.00
Networked standby power for CLS	0 W
Claim of equivalent power	Yes
Length	118.00 mm
Height	20,0 mm
Width	20,0 mm
Chromaticity coordinate x	0.458
Chromaticity coordinate y	0.410
R9 Colour rendering index	1
Beam angle correspondence	SPHERE_360
Survival factor	0.90
Displacement factor	0.70
LED light source replaces a fluorescent light source	no
EPREL ID	1403269,522892
Model number	AC32135,AC24771

download_data

Documents and certificates		document_name
	Declarations Of Conformity CE	LED SLIM LINE 78 60 NON-DIM
Photometric and lighting design files		document_name
	Spectral power distribution	349927_2700K_Evl_5630.eps

logistical_data

product_code	packaging_unit	dimensions	weight	volume
4058075432734	Folding box 1	21 mm x 49 mm x 155 mm	60.00 g	0.16 dm ³
4058075633117	Shipping box 6	111 mm x 83 mm x 131 mm	428.00 g	1.21 dm ³
4058075633124	Shipping box 96	350 mm x 238 mm x 289 mm	7326.00 g	24.07 dm ³

logistical_data_text

disclaimer_title

disclaimer_text